


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	H1	REVISED PER ECO-11-004587	11MAR11	RK	HMR
	J	REVISED PER ECO-17-000037	10MAR2017	RS	MZ

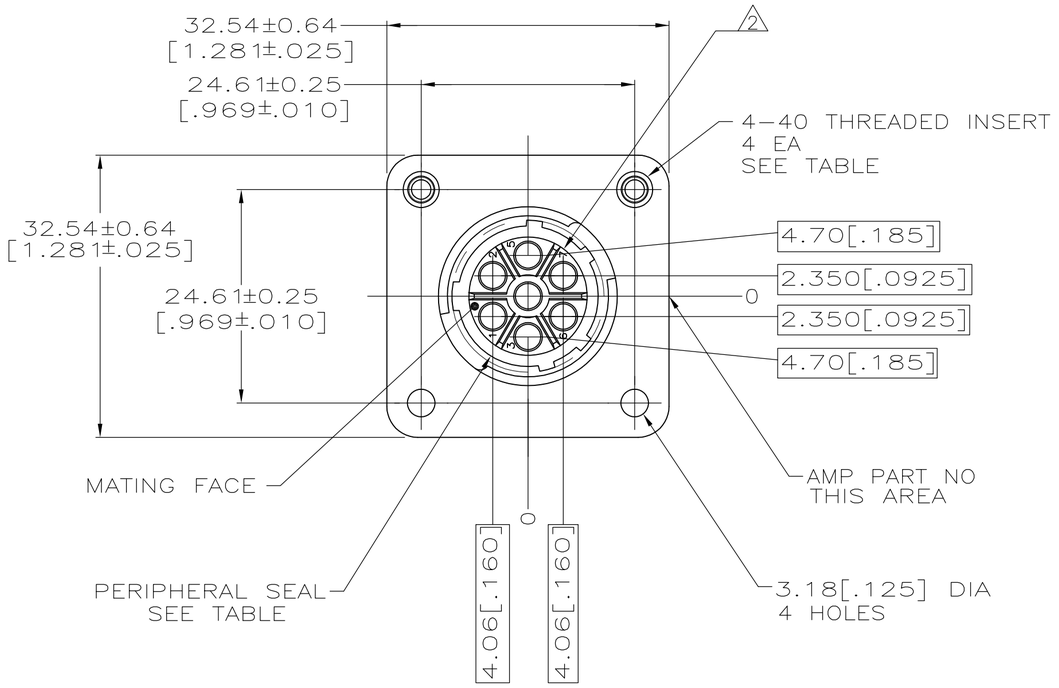

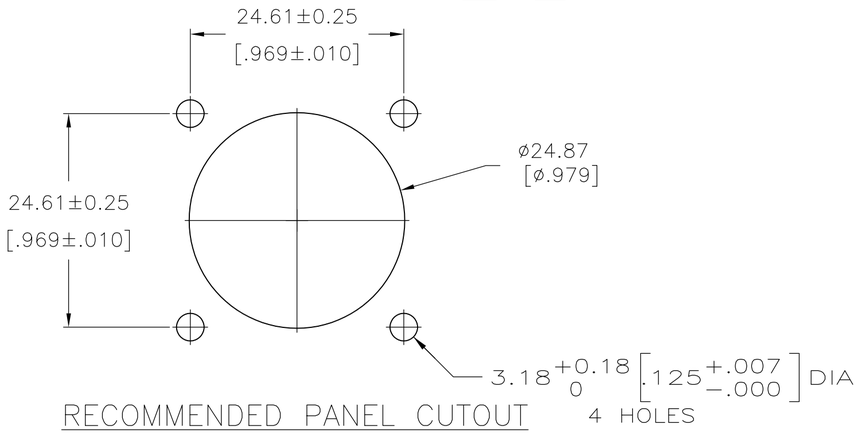

RECOMMENDED PANEL CUTOUT

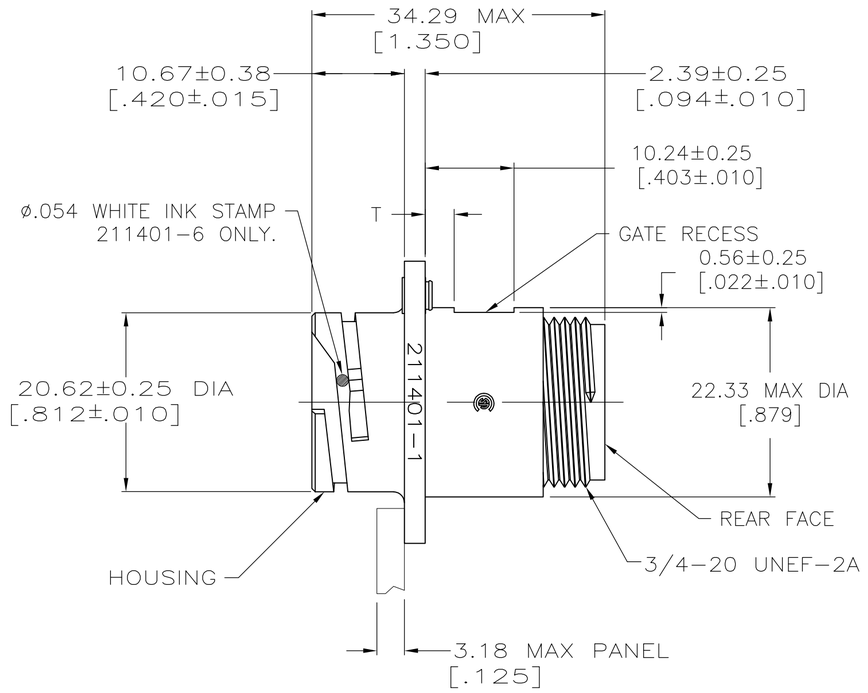

	T	4-40 THREADED INSERTS	PERIPHERAL SEAL	MAX WIRE INSULATION DIA	PART NUMBER
	3.35±0.25 [.132±.010]	NO	NO	3.81 [.150]	211401-8
OBSOLETE	1.83±0.25 [.072±.010]	NO	NO	3.81 [.150]	211401-6
5	1.83±0.25 [.072±.010]	YES	NO	2.54 [.100]	211401-5
	1.83±0.25 [.072±.010]	YES	NO	3.81 [.150]	211401-4
	1.83±0.25 [.072±.010]	NO	YES	3.81 [.150]	211401-3
	1.83±0.25 [.072±.010]	NO	NO	2.54 [.100]	211401-2
	1.83±0.25 [.072±.010]	NO	NO	3.81 [.150]	211401-1

1. HOUNSING: THERMOPLASTIC, BLACK.
   PERIPHERAL SEAL: ELASTOMER, GRAY.
   THREADED INSERTS: BRASS.
2. CAVITY IDENTIFICATION ON FRONT AND REAR FACE.
3. WILL ACCEPT SEVEN (7) MULTIMATE PIN CONTACTS.
4. .0050MAX FLASH PERMITTED IN THE AREA OF DIMENSION T, .020 MAX FLASH PERMITTED ON MATING FACE SIDE AND .025 MAX FLASH PERMITTED ON REAR FACE SIDE.
5. PRELIMINARY PART NUMBER.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± 0.13 [.005]
3 PLC ± -
4 PLC ± -
ANGLES ± -

MATERIAL 1
FINISH -

DWN D.HARDY 08-01-94
CHK R.STONE 08-10-94
APVD - —
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

TE Connectivity

NAME
RECEPTACLE HOUSING,
STANDARD SEX, 13-7, CPC


SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-211401	—


CUSTOMER DRAWING | SCALE 2:1 | SHEET 1 OF 2 | REV J

211401

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	–	SEE SHEET 1	–	—	—
	–	SEE SHEET 1	–	—	—

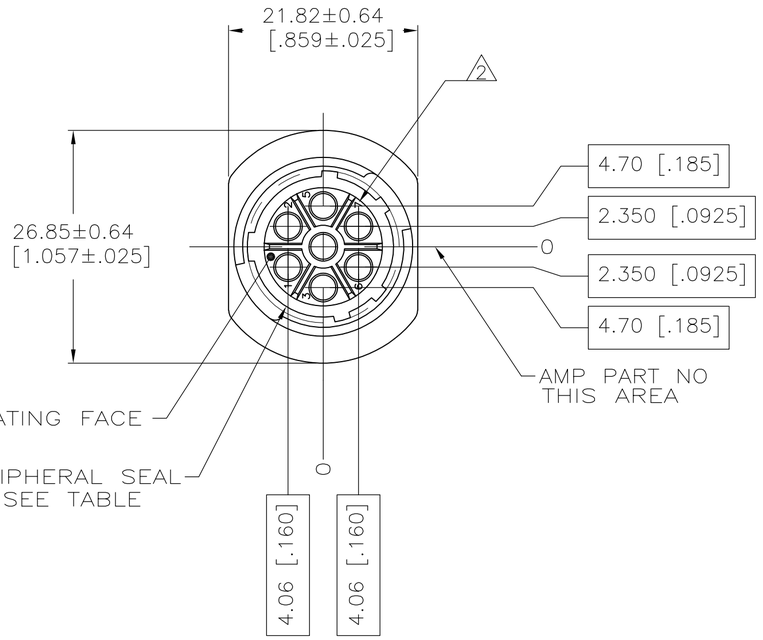

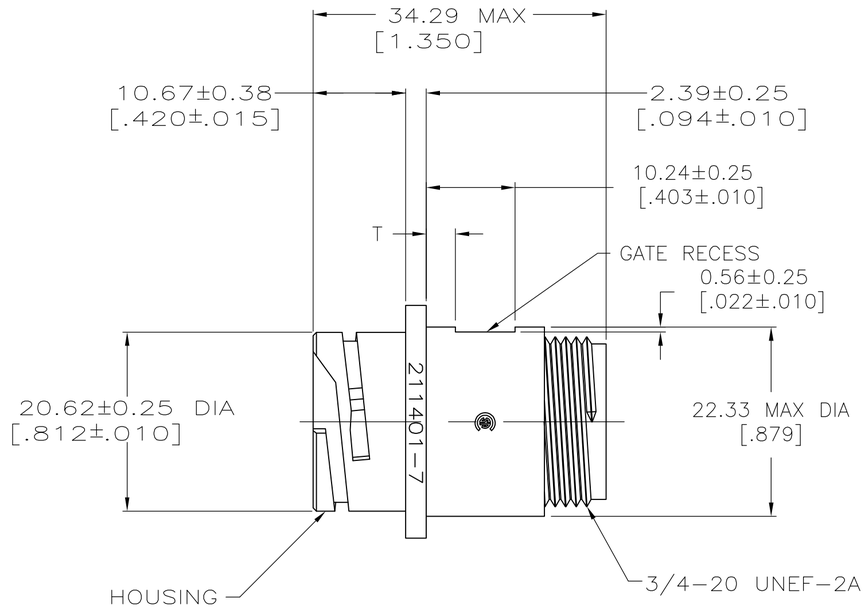

1.83±0.25 [.072±.010]	NO	2.54 [.100]	211401-7
T	PERIPHERAL SEAL	MAX WIRE INSULATION DIA	PART NUMBER

1. HOUNSING: THERMOPLASTIC, BLACK.
   PERIPHERAL SEAL: ELASTOMER, GRAY.
   THREADED INSERTS: BRASS.
2. CAVITY IDENTIFICATION ON FRONT AND REAR FACE.
3. WILL ACCEPT SEVEN (7) MULTIMATE PIN CONTACTS.
4. .005 MAX FLASH PERMITTED IN THE AREA OF DIMENSION T, .020 MAX FLASH PERMITTED ON MATING FACE SIDE AND .025 MAX FLASH PERMITTED ON REAR FACE SIDE.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± 0.13 [.005]
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL 1
FINISH –

DWN D.HARDY 08-01-94
CHK R.STONE 08-10-94
APVD – —
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

TE Connectivity

NAME
RECEPTACLE HOUSING,
STANDARD SEX, 13-7, CPC

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-211401	—

CUSTOMER DRAWING | SCALE 2:1 | SHEET 2 OF 2 | REV J

211401